



ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Infiniti and Vector Fin Façades Maple Façades Ltd.

EPD HUB, HUB-1561

Publishing on 27.07.2024, last updated on 27.07.2024, valid until 27.07.2029







GENERAL INFORMATION

MANUFACTURER

Manufacturer	Maple Facades Ltd.				
Address	Units 11a – 11d, Bramhall Moor Technology				
	Park, Pepper Road, Hazel Grove, Stockport,				
	Cheshire, SK7 5SA, United Kingdom				
Contact details	sales@maplefacades.co.uk				
Website	https://maplefacades.co.uk/				

EPD STANDARDS, SCOPE AND VERIFICATION

•	
Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Construction product
Category of EPD	Third party verified EPD
Scope of the EPD	Cradle-to-gate with options, A4-A5, and modules C1-C4, D
EPD author	Adeleh Ghodsizadeh (Blue Marble Environmental Partnerships Ltd.)
EPD verification	Independent verification of this EPD and data, according to ISO 14025: ☐ Internal certification ☑ External verification
EPD verifier	Haiha Nguyen, as an authorized verifier acting for EPD Hub Limited

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

PRODUCT

Product name	Infiniti and Vector Fin Façades (rectangular and elliptical fins)
Additional labels	-
Product reference	-
Place of production	Stockport, UK
Period for data	2023 (Calendar Year)
Averaging in EPD	Multiple products
Variation in GWP-fossil for A1-A3	23%

ENVIRONMENTAL DATA SUMMARY

Declared unit	1m2
Declared unit mass	33.5704 kg
GWP-fossil, A1-A3 (kgCO2e)	180
GWP-total, A1-A3 (kgCO2e)	170
Secondary material, inputs (%)	25.3
Secondary material, outputs (%)	86.6
Total energy use, A1-A3 (kWh)	680
Total water use, A1-A3 (m3e)	1.74





PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Maple is a leading designer, manufacturer and installer of rainscreen cladding, architectural façades, solar shading and screening for building exteriors and interiors.

Since 1983, we've been combining innovation, technical excellence and exceptional customer service to deliver projects that save energy, create visual impact and make buildings more comfortable for their occupants.

PRODUCT DESCRIPTION

This EPD represent Infiniti and Vector fin façades which are described below:

Infiniti fin façade

Continuous, hidden-fix architectural fin façade solution for all building types with blade profile options ranging from 100mm to 700mm in 6063 Aluminium, particularly where a continuous design must be achieved.

Vector fin façade

Vertical and Horizontal 6063 Aluminium feature-fin system with numerous design possibilities for all building types and modular 'cassette' installation approach for smaller blades.

Infiniti and vector architectural facade systems are primarily used to provide screening facades for multi-storey car parks, education buildings and multi-purpose developments.

Aerofoil, rectangular, and bespoke blades offer an effective solution for building envelope design, featuring PPC or anodised coatings for corrosion protection. These systems can be customised to meet project specifications, including colour, finish, and shape.

Further information can be found at: https://maplefacades.co.uk/

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin		
Metals	100	Global		
Minerals	-			
Fossil materials	-			
Bio-based materials	-			

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	2.84

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1m2
Mass per declared unit	33.5704 kg
Functional unit	-
Reference service life	-

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0.1% (1000 ppm).





PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Pro	Product stage		Assembly stage		Use stage			Use stage End of life stage Beyond the system boundaries			End of life stage			em				
Α	Α	A3	Α	Α	B1	B2	В3	B4	B5	В6	B7	C1	C2	C3	C4		D	
1	2		4	5														
x	х	x	x	x	MND	MND	MND	MND	MND	MND	MND	x	x	x	x	х		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recoverv	Recycling

Modules not declared = MND. Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

The product is an assembly of (1) brackets, (2) endplates, (3) fins and (4) associated fixings (the components). Raw materials for components are sourced globally, though predominantly from Europe, with fixings sourced from the Far East.

A weighted average of transportation distances has been calculated to account for raw material transportation.

Steel brackets are fabricated, and hot dip galvanised in the UK. Aluminium brackets are fabricated, and powder coated in the UK.

Endplates and fins are fabricated, and powder coated in the UK. Fixings are hot dip galvanised outside of the UK. All components are transported to Maple Façades for assembly and packaging before transportation to site. (A1, A2).

Assembly occurs on-site at the facilities of Maple Façades in Stockport, UK. Assembly requires the use of low and medium voltage electricity and heat production. (A3). 10% production losses are accounted for as manufacturing waste. Manufacturing waste is assumed to travel 50km for waste treatment via >32 tonne lorry.

Recycling of manufacturing wastes is assumed at 92% and 96% for Aluminium and Steel respectively. Residual waste is transferred to landfill (A3).

The components are packaged separately, using pallets, plastic wrapping and either polystyrene blocks or timber battening layers for protection. (A3)

NOTE: Infiniti and Vector Fins (whether rectangular or elliptical) may be supplied with either Mild Steel or Aluminium brackets depending on the structure they are being attached to. In order to test the impact of using either Steel or Aluminium brackets, a sensitivity analysis was performed. Separate LCA models were created for Rectangular and Elliptical Fins with either 100% Aluminium brackets or 100% Mild Steel brackets. This was compared to a baseline model which assumed 85% of brackets are Mild Steel and 15% are Aluminium (representing actual production volumes). The results of the sensitivity analysis showed that neither 100% Aluminium brackets nor 100% Mild Steel brackets affected the GWP results by more than +/-50%. See section on averaging for further details.





TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurring from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

A typical scenario has been modelled for transportation to site at 161km (100 miles) via fully laden 18 tonne lorry. (A4).

High-level installation is via diesel-powered aerial lift and hand-held power tools (A5). Low Voltage electricity is used for charging the tools.

Packaging waste leaves the system at the point of installation, with pallets / timber recycled at a rate of 44.1% (DEFRA, 2022). With plastic packaging sent to landfill. It is assumed that waste treatment occurs no more than 50km from the installation site and transport is via >32 tonne lorry. (A5).

PRODUCT USE AND MAINTENANCE (B1-B7)

This EPD does not cover the use phase.

Air, soil, and water impacts during the use phase have not been studied.

PRODUCT END OF LIFE (C1-C4, D)

At the end of life, the product is assumed to be removed using diesel powered aerial lift and hand-held power tools (C1).

Transport to waste treatment has been modelled as 50km via >32 tonne lorry (C2).


Steel components are assumed to achieve a recycling rate of 96%, with the remaining 4% reaching landfill (<u>Industry CPD: Structural steel and the circular economy</u>). Aluminium components achieve a recycling rate of 92%, with the remaining 8% reaching landfill (<u>ASM Metal Recycling</u>) (C3, C4).

Benefits and loads are accounted for in Module D for the provision of recyclates (steel, aluminium and wood packaging) to subsequent lifecycles. (D).





MANUFACTURING PROCESS AND SYSTEM BOUNDARY

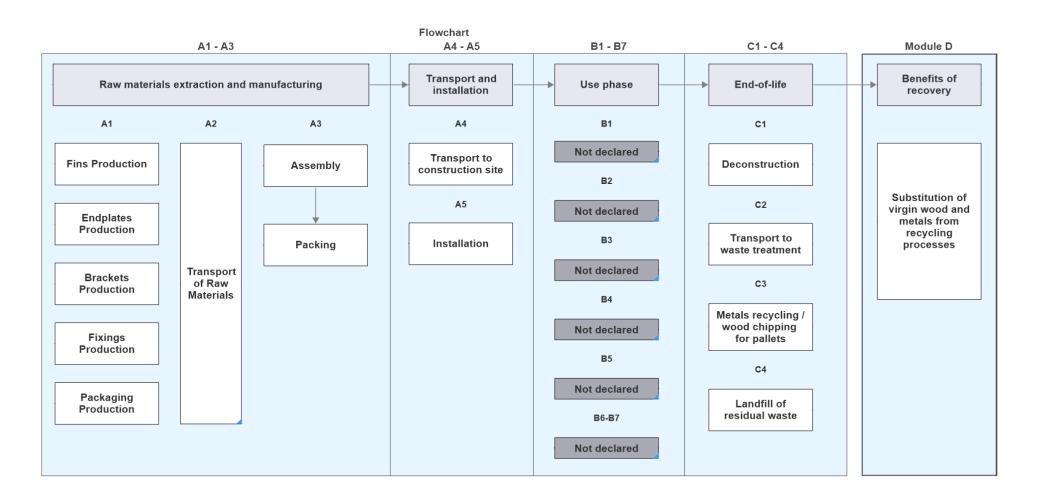





LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	No allocation
Manufacturing energy and waste	No allocation

AVERAGES AND VARIABILITY

Type of average	Multiple products
Averaging method	Representative product
Variation in GWP-fossil for A1-A3	23%

This EPD applies to Rectangular and Elliptical Fins used as part of a system (brackets, endplates, fins and fixings). In order to create a representative average, the following products were considered:

Rectangular Fins

Materials = Aluminium Thickness = 2mm

Elliptical Fins

Materials = Aluminium Thickness = 3mm

For the range, the variance in GWP fossil (A1-A3) is shown below:

Rectangular Fins GWP (fossil) value: 199 kg CO2 e Elliptical Fins GWP (fossil) value: 161 kg CO2 e

Variance (max +/- 50%): 23%





SENSITIVITY ANALYSIS

Infiniti and Vector Fins (whether rectangular or elliptical) may be supplied with either Mild Steel or Aluminium brackets depending on the structure they are being attached to. In order to test the impact of using either Steel or Aluminium brackets, a sensitivity analysis was performed. Separate LCA models were created for Rectangular and Elliptical Fins with either 100% Aluminium brackets or 100% Mild Steel brackets. This was compared to a baseline model which assumed 85% of brackets are Mild Steel and 15% are Aluminium (representing actual production volumes). The results of the sensitivity analysis showed that neither 100% Aluminium brackets nor 100% Mild Steel brackets affected the GWP results by more than +/-50%.

See variation below:

A1 GWP (kg CO2e)							
Elliptical Rectangular							
Normal	148	192					
100% steel bracket	171	203					
100% aluminium bracket	99	135					


Percentage of Change

	Elliptical	Rectangular
Normal	0.0	0
100% steel bracket	13.5	5.4
100% aluminium bracket	-49.5	-42.2

^{*}The changes are calculated considering the Normal product as the base.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent v3.8 and One Click LCA databases were used as sources of environmental data.



^{**}Only the GWP for raw materials is considered.

^{***}Normal refers to brackets made of 85% steel and 15% aluminium.





ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	В3	B4	B5	В6	B7	C1	C2	C3	C4	D
GWP – total1)	kg CO₂e	1.64E+02	9.97E+00	-4.79E+00	1.70E+02	7.90E+00	1.25E+01	MND	1.69E+00	3.01E-01	6.17E-01	3.53E-02	-8.12E+01						
GWP – fossil	kg CO₂e	1.64E+02	9.97E+00	5.62E+00	1.80E+02	7.89E+00	2.05E+00	MND	1.69E+00	3.01E-01	7.36E-01	4.45E-02	-8.12E+01						
GWP – biogenic	kg CO₂e	1.38E-01	1.78E-04	-1.04E+01	-1.03E+01	0.00E+00	1.04E+01	MND	0.00E+00	0.00E+00	-1.20E-01	-9.26E-03	0.00E+00						
GWP – LULUC	kg CO₂e	2.54E-01	4.74E-03	1.37E-02	2.73E-01	5.20E-03	4.87E-04	MND	2.08E-04	1.25E-04	9.65E-04	4.89E-05	-6.25E-02						
Ozone depletion pot.	kg CFC ₋₁₁ e	8.62E-06	2.20E-06	6.13E-07	1.14E-05	1.55E-06	3.95E-07	MND	3.56E-07	6.55E-08	9.11E-08	6.28E-09	-3.23E-06						
Acidification potential	mol H+e	1.14E+00	4.38E-02	2.36E-02	1.21E+00	4.34E-02	1.91E-02	MND	1.73E-02	1.02E-03	9.35E-03	3.09E-04	-4.98E-01						
EP-freshwater2)	kg Pe	7.28E-03	8.62E-05	1.90E-04	7.56E-03	1.09E-04	2.00E-05	MND	6.16E-06	2.55E-06	3.95E-05	1.35E-06	-2.14E-03						
EP-marine	kg Ne	1.56E-01	1.34E-02	5.68E-03	1.75E-01	1.29E-02	8.20E-03	MND	7.63E-03	2.48E-04	1.98E-03	7.85E-05	-6.11E-02						
EP-terrestrial	mol Ne	2.56E+00	1.48E-01	6.45E-02	2.77E+00	1.43E-01	8.86E-02	MND	8.37E-02	2.75E-03	2.28E-02	8.74E-04	-8.88E-01						
POCP ("smog")3)	kg NMVOCe	6.14E-01	4.39E-02	2.06E-02	6.79E-01	4.64E-02	2.47E-02	MND	2.30E-02	9.24E-04	6.28E-03	2.59E-04	-2.59E-01						
ADP-minerals & metals4)	kg Sbe	2.69E-03	4.55E-05	5.37E-05	2.79E-03	1.12E-04	4.16E-06	MND	1.20E-06	1.05E-06	9.92E-05	1.04E-07	-2.92E-03						
ADP-fossil resources	MJ	1.92E+03	1.45E+02	1.31E+02	2.19E+03	1.11E+02	2.79E+01	MND	2.31E+01	4.37E+00	9.98E+00	6.91E-01	-8.72E+02						
Water use5)	m³e depr.	6.28E+01	7.33E-01	2.32E+00	6.58E+01	7.80E-01	1.53E-01	MND	6.71E-02	1.92E-02	1.94E-01	7.72E-03	-8.17E+00						

¹⁾ GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.





ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	А3	A1-A3	A4	A5	B1	B2	В3	B4	B5	В6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	1.95E-05	7.66E-07	2.38E-07	2.05E-05	8.31E-07	4.95E-07	MND	4.61E-07	2.47E-08	1.22E-07	4.85E-09	-5.84E-06						
Ionizing radiation6)	kBq U235e	1.47E+01	7.39E-01	3.32E+00	1.87E+01	6.03E-01	1.64E-01	MND	1.31E-01	2.04E-02	1.11E-01	3.89E-03	-4.87E+00						
Ecotoxicity (freshwater)	CTUe	5.15E+03	1.31E+02	1.49E+02	5.43E+03	1.28E+02	2.31E+01	MND	1.39E+01	4.01E+00	4.52E+01	6.30E+02	-2.52E+03						
Human toxicity, cancer	CTUh	5.46E-07	4.48E-09	1.41E-08	5.65E-07	1.21E-08	1.58E-09	MND	5.27E-10	1.13E-10	1.38E-09	3.92E-11	-2.00E-06						
Human tox. non- cancer	CTUh	4.00E-06	1.25E-07	8.80E-08	4.22E-06	1.49E-07	1.67E-08	MND	1.01E-08	3.68E-09	6.19E-08	1.04E-09	-4.01E-07						
SQP7)	-	5.24E+02	8.75E+01	8.68E+02	1.48E+03	5.59E+01	7.46E+00	MND	3.26E+00	3.07E+00	2.01E+01	1.00E+00	-5.70E+02						

⁶⁾ EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	В6	B7	C1	C2	C3	C4	D
category																			
Renew. PER as energy8)	MJ	2.06E+02	2.27E+00	8.07E+01	2.89E+02	2.67E+00	6.66E-01	MND	3.06E-01	5.16E-02	1.77E+00	3.76E-02	-2.65E+02						
Renew. PER as material	MJ	0.00E+00	0.00E+00	9.09E+01	9.09E+01	0.00E+00	-9.09E+01	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
Total use of renew. PER	MJ	2.06E+02	2.27E+00	1.72E+02	3.80E+02	2.67E+00	-9.02E+01	MND	3.06E-01	5.16E-02	1.77E+00	3.76E-02	-2.65E+02						
Non-re. PER as energy	MJ	1.89E+03	1.45E+02	1.22E+02	2.16E+03	1.11E+02	2.79E+01	MND	2.31E+01	4.37E+00	9.98E+00	6.91E-01	-8.72E+02						
Non-re. PER as material	MJ	1.38E+01	0.00E+00	6.86E+00	2.07E+01	0.00E+00	-6.86E+00	MND	0.00E+00	0.00E+00	-1.27E+01	-1.07E+00	0.00E+00						
Total use of non- re. PER	MJ	1.90E+03	1.45E+02	1.29E+02	2.18E+03	1.11E+02	2.10E+01	MND	2.31E+01	4.37E+00	-2.76E+00	-3.76E-01	-8.72E+02						
Secondary materials	kg	8.50E+00	5.86E-02	3.45E-01	8.90E+00	5.85E-02	2.37E-02	MND	8.79E-03	1.45E-03	1.11E-02	1.65E-04	5.81E+00						
Renew. secondary fuels	MJ	5.10E-02	7.24E-04	3.04E+00	3.10E+00	5.57E-04	1.23E-04	MND	2.91E-05	1.87E-05	5.78E-04	9.54E-06	-2.91E-02						
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
Use of net fresh water	m3	1.66E+00	1.96E-02	5.49E-02	1.74E+00	1.99E-02	4.50E-03	MND	1.52E-03	5.19E-04	5.85E-03	5.76E-04	-1.22E+00						

⁸⁾ PER = Primary energy resources.





END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	В3	B4	B5	В6	B7	C1	C2	СЗ	C4	D
Hazardous waste	kg	4.18E+01	2.07E-01	3.28E-01	4.23E+01	2.76E-01	1.07E-01	MND	3.16E-02	6.30E-03	6.78E-02	0.00E+00	-9.97E+01						
Non-hazardous waste	kg	3.27E+02	3.54E+00	7.77E+00	3.38E+02	4.89E+00	4.84E+00	MND	2.37E-01	1.01E-01	2.16E+00	1.93E+00	-1.32E+02						
Radioactive waste	kg	5.25E-03	9.70E-04	9.12E-04	7.13E-03	7.13E-04	1.78E-04	MND	1.64E-04	2.90E-05	5.85E-05	0.00E+00	-1.78E-03						

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	В3	B4	B5	В6	B7	C1	C2	C3	C4	D
Components for re- use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
Materials for recycling	kg	0.00E+00	0.00E+00	2.96E+00	2.96E+00	0.00E+00	3.19E+00	MND	0.00E+00	0.00E+00	3.36E+01	0.00E+00	0.00E+00						
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00						
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00						





ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	А3	A1-A3	A4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	С3	C4	D
Global Warming Pot.	kg CO₂e	1.58E+02	9.87E+00	5.54E+00	1.74E+02	7.75E+00	2.29E+00	MND	1.67E+00	2.98E-01	7.25E-01	4.32E-02	-7.92E+01						
Ozone depletion Pot.	kg CFC ₋₁₁ e	8.04E-06	1.75E-06	5.24E-07	1.03E-05	1.23E-06	3.15E-07	MND	2.82E-07	5.19E-08	7.36E-08	5.01E-09	-2.81E-06						
Acidification	kg SO₂e	8.96E-01	3.39E-02	1.86E-02	9.48E-01	3.37E-02	1.38E-02	MND	1.23E-02	8.20E-04	7.55E-03	2.45E-04	-4.17E-01						
Eutrophication	kg PO ₄ ³e	3.40E-01	8.01E-03	7.77E-03	3.55E-01	8.67E-03	1.54E-02	MND	2.87E-03	1.84E-04	2.49E-03	6.95E-05	-1.14E-01						
POCP ("smog")	kg C ₂ H ₄ e	6.33E-02	1.33E-03	1.59E-03	6.62E-02	2.81E-03	4.39E-04	MND	2.72E-04	3.74E-05	2.86E-04	1.61E-05	-1.76E-02						
ADP-elements	kg Sbe	2.65E-03	4.44E-05	5.32E-05	2.74E-03	1.11E-04	4.11E-06	MND	1.19E-06	1.03E-06	9.91E-05	9.83E-08	-2.92E-03						
ADP-fossil	MJ	1.92E+03	1.45E+02	1.31E+02	2.19E+03	1.11E+02	2.79E+01	MND	2.31E+01	4.37E+00	9.98E+00	6.90E-01	-8.72E+02						





VERIFICATION STATEMENT

VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliancy with reference standard, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The digital background data for this EPD

Why does verification transparency matter? Read more online
This EPD has been generated by One Click LCA EPD generator, which has been verified and approved by the EPD Hub.

THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of the data collected and used in the LCA calculations, the way the LCA-based calculations have been carried out, the presentation of environmental data in the EPD, and other additional environmental information, as present with respect to the procedural and methodological requirements in ISO 14025:2010 and reference standard.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

HaiHa Nguyen, as an authorized verifier acting for EPD Hub Limited 27.07.2024

